



Stock & Shaker Grids



SIZE			PRIMED
3mtr	662kg	2000x3000	\$2588
3.6mtr	726kg	2000x3600	\$2858
4mtr	879kg	2000x4000	\$3010
Wings			\$265

- All grids built to Australian Standards
- Average size of Shaker Grids 4000x2250 (Max 2500) Other sizes available on request.
- Shaker grids are perfect for the entrance to building sites, keeping the road clean & tidy.
- Available with lift out top to gain easy access for cleaning. (Additional costs may apply)
- Top simply bolts down as shown.
- Wings simply slip into place.
- Pick up or delivery.

Grids also available for HIRE.

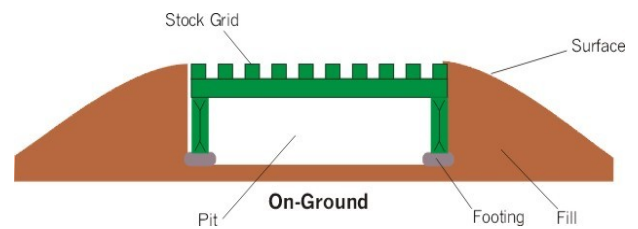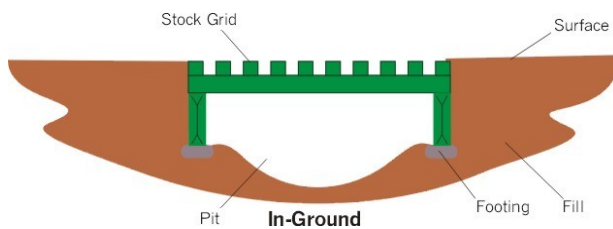

- **PIT** The pit should be deep enough to allow for drainage and ease of cleaning. Silt build up will occur over time.
- **FOOTING** A firm footing is required for both in ground and above ground installations. Depending on ground conditions, a compacted base is generally more than satisfactory, however if in doubt, a concrete footing should be installed.
- **GRID** Care should be taken to ensure that the grid sits correctly in relation to the camber of the road.
- **FILL** Compaction of filled areas is critical to successful grid installation and ultimately, grid life.
- **SURFACE** Ensure that the compacted ground surface is level with the grid rails.
- Incorrect surface levels will affect the life of the grid.